


R-ECO C

MOTORIZED INITIAL PINCH THREE ROLLS

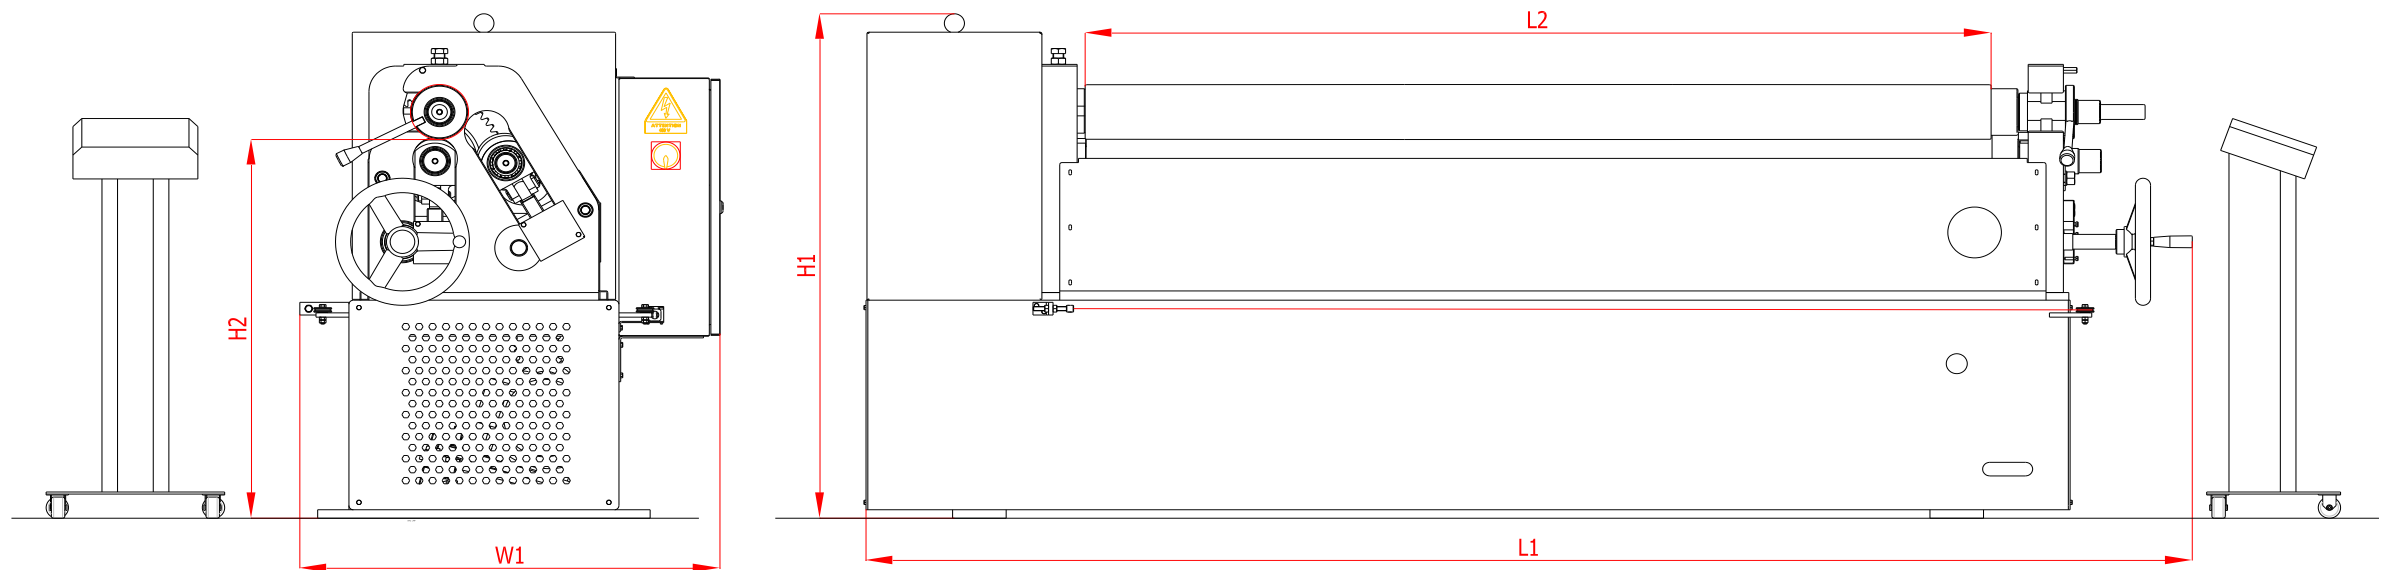

MODEL TYPE	Bending Length	Bending Capacity	Top Roll	Length	Width	Height	Working Height	Weight	Main Motor Power	Optional Back Roll Motor Power
	L2 (inch)	T (inch)	Ød (inch)	L1 (inch)	W (inch)	H1 (inch)	H2 (inch)	(Lbs)	(HP)	(HP)
R-ECO C 3-433	3' 4"	8 Ga	4.33	78	37	47	36	2635	3	1.5
R-ECO C 3-511	3' 4"	6 Ga	5.11	78	37	47	36	2811	3	1.5
R-ECO C 4-472	4' 2"	8 Ga	4.72	88	37	47	36	2965	3	1.5
R-ECO C 4-551	4' 2"	6 Ga	5.51	88	37	47	36	3142	3	1.5
R-ECO C 5-433	5'	12 Ga	4.33	98	37	47	36	2950	3	1.5
R-ECO C 5-472	5'	11 Ga	4.72	98	37	47	36	3038	3	1.5
R-ECO C 5-511	5'	10 Ga	5.11	98	37	47	36	3142	3	1.5
R-ECO C 5-551	5'	8 Ga	5.51	98	37	47	36	3245	3	1.5
R-ECO C 6-433	6' 7"	14 Ga	4.33	117	37	47	36	3131	3	1.5
R-ECO C 6-511	6' 7"	11 Ga	5.11	117	37	47	36	3289	3	1.5
R-ECO C 6-551	6' 7"	10 Ga	5.51	117	37	47	36	3450	3	1.5
R-ECO C 8-551	8' 3"	12 Ga	5.51	137	37	47	36	3655	3	1.5

The values above are based on 38 KSI yield material.
 Different material widths and plate types can be calculated using the RMT Roll Bending Calculator.
 Conical bending capacities depend on cone angle and are half the above mentioned values.
 Motor power and machine weight will increase with optional features.
 Due to ongoing product development, specifications may change at any time.

**Larger or Custom
Machines Available**