





# S-FAB CDM 26-40

Semiautomatic Column Type Double Miter Bandsaw

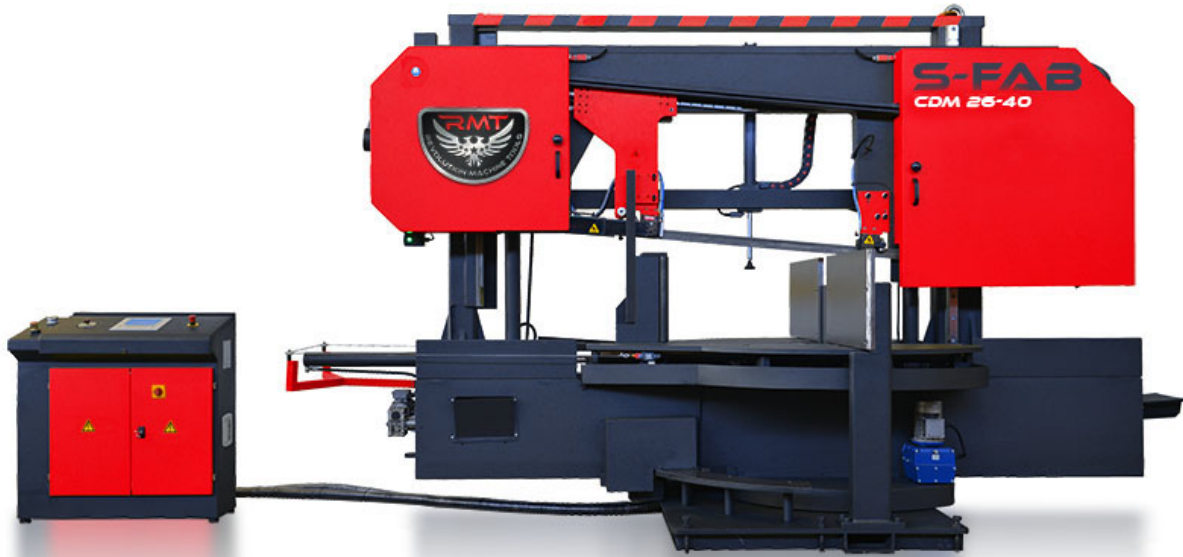

## STANDARD

- Control Panel NC
- Motorized Blade Brush
- Hydraulic Vice
- Security Switch
- Siti Heavy Duty Gearbox
- Inverter
- Sensitive Pressure Control
- Hydromechanical Blade Tension
- Optical Saw Height Adjustment
- Linear Guide Rails
- Turn Table
- Turn Table Brake
- Proximity Switch for Sensing Blade Slippage
- Chip Conveyor
- Coolant Pump
- 4ft Roller Table

## OPTIONAL

- Hydraulic Blade Tension
- Hydraulic Top Clamping
- Microspray Cooling
- 10ft Roller Table
- 10ft Motorized Roller Table
- Laser Line

S-FAB CDM 26-40		Metric	US
Capacity at 0°	Round	660 mm	26" in
	Flat (H x W)	660 x 1016 mm	26" x 40" in
	Square	660 mm	26" in
Capacity at 30°	Round	650 mm	25.6" in
	Flat (H x W)	600 x 840 mm	23.6" x 33" in
	Square	600 mm	23.6" in
Capacity at 45°	Round	650 mm	25.6" in
	Flat (H x W)	600 x 660 mm	23.6" x 26" in
	Square	600 mm	23.6" in
Capacity at 60°	Round	440 mm	17.3" in
	Flat (H x W)	600 x 440 mm	23.6" x 17.3" in
	Square	440 mm	17.3" in
Capacity at 30°	Round	650 mm	25.6" in
	Flat (H x W)	600 x 840 mm	23.6" x 33" in
	Square	600 mm	23.6" in
Capacity at 45°	Round	650 mm	25.6" in
	Flat (H x W)	600 x 660 mm	23.6" x 26" in
	Square	600 mm	23.6" in
Cutting Speeds		20- 100 m/min	65- 328 ft/min
Band Dims.		8400 x 54 x 1.6 mm	330.7 x 2.12 x 0.063 in
Main Motor		7.5 kW	10 HP
Hydraulic Motor		5.5 kW	7.5 HP
Weight		6250 kg	13779 lbs
Machine Dims.	Length	4750 mm	188" in
	Width	2270 mm	90" in
	Height	2630 mm	104" in